

(12) ~~INTERNATIONAL APPLICATION PUBLISHED UNDER
THE PATENT COOPERATION TREATY (PCT)~~

(19) ~~World Intellectual Property Organization~~ [WIPO] [Bar Code]
~~International Bureau~~

(43) ~~International Publication Date~~ (10) ~~International Publication Number~~
~~January 13, 2005 (01/13/2005)~~ **PCT** **WO 2005/003570 A1**

(51) ~~International Patent Classification²:~~ **F15B 1/22, 1/24**

(21) ~~International Application No.:~~ PCT/EP2004/002964

(22) ~~International Filing Date:~~ March 20, 2004 (03/20/2004)

(25) ~~Language in which the international application was originally
filed:~~ German

(26) ~~Language in which the international application is published:~~
German

(30) ~~Priority Data:~~
103 30 516.5 July 5, 2003 (07/05/2003) DE

(71) ~~Applicant (for all designated states except the U.S.):~~ **HYDAC
TECHNOLOGY GMBH** [DE/DE]; Industriegebiet, 66280
Sulzbach/Saar (DE).

(72) ~~Inventor; and~~

(75) ~~Inventor/Applicant (U.S. only):~~ **WEBER, Norbert** [DE/DE];
Mozartstrasse 5, 66280 Sulzbach/Saar (DE).

(74) ~~Representative:~~ **BARTELS AND PARTNER**; Lange
Strasse 51, 70174 Stuttgart (DE).

(81) ~~Designated States (unless indicated otherwise, for each
available type of national protective right):~~ AE, AG, AL,
AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES,
FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) ~~Designated States (unless indicated otherwise, for each
available type of national protective right):~~ ARIPO (BW,
GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European Patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO,

[continued on next page]

(54) ~~Title:~~ **50234**

Patent Application

of


NORBERT WEBER

for

HYDRAULIC ACCUMULATOR,
ESPECIALLY PISTON-TYPE ACCUMULATOR



WO 2005/003570 A1

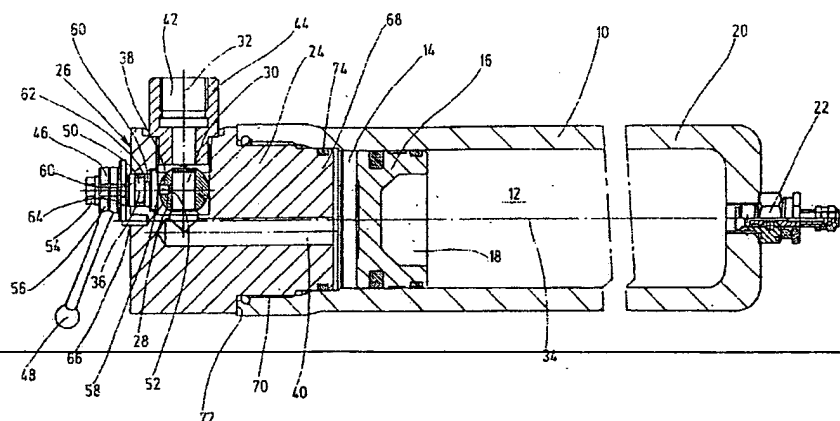

(57) Abstract: The invention relates to a hydraulic accumulator, especially a piston-type accumulator, comprising an accumulator housing (10) as well as at least one gas chamber (12) that is arranged therein and a fluid chamber (14) which are separated from each other via a separating element (16), particularly in the form of a piston. One free end of the accumulator housing (10) is sealed via a valve block (24) that is provided with a ball valve (28) which opens or blocks a fluid-guiding path (30) from the interior of the accumulator housing (10) towards the outside in the open position or closed position thereof such that the ball valve forms an integral part of the accumulator housing via the valve block and is thus accommodated in a compact manner within the hydraulic accumulator solution, also resulting in a reduction of the free fluid paths and therefore a reduction of tubing.

[Fortsetzung auf der nächsten Seite]

WO 2005/003570 A1

[Bar Code]

SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

With International Search Report.

Reference is made for an explanation Field of the
two-letter codes and the other abbreviations to the Guidance Notes
on Codes and Abbreviations in the front section of each regular
PCT Gazette edition. Invention

Hydraulic Accumulator, Especially Piston-Type Accumulator

The present invention relates to a hydraulic accumulator, especially a piston-type accumulator, having an accumulator housing and at least one gas chamber ~~located therein~~ and a fluid chamber ~~which are located therein~~ separated from each other by a separating element, especially in the form of a piston.

Background of the Invention

One of the primary tasks of hydraulic accumulators is to hold specific volumes of pressurized fluids of a hydraulic system and to return them to the system again on demand. Hydraulic accumulators are generally piston accumulators, bladder accumulators, diaphragm accumulators, ~~but also~~ as well as weighted and spring-loaded accumulators. With these hydraulic accumulators, a plurality of tasks can be performed, such as energy storage, impact, vibration and pulsation damping, energy recovery, volumetric flow compensation, etc.

Valve control units ~~which are~~ generally provided with switching or directional control valves for managing the fluid flow to and from the hydraulic accumulator are used for operation and triggering of hydraulic accumulators. The hydraulic accumulator is generally connected to tubing with fluid lines which establish the fluid-carrying connection between the accumulator and the valve control unit. The disadvantages of the known solution, as can be readily obtained on the market in a plurality of embodiments, ~~consist of~~ involve tightness problems due to the increased number of

connections between the hydraulic accumulator tubing and valve control unit and ~~also~~ the added costs for the

network of fluid lines. Especially under tight installation conditions, problems arise moreover in intelligently accommodating the plurality of components indicated and connecting them to each other so as to carry fluid. Since moreover different manufacturers are responsible for hydraulic accumulators, the tubing, and/or the valves of the valve control unit, on-site matching problems arise especially at the installation sites.

~~In DE-A-39 41 241, it has already been proposed for a~~ discloses a piston accumulator, especially for drive slip-controlled brake systems, ~~that having~~ a switching valve in the form of a charging valve ~~be provided~~ in a space-saving design with its direction of motion transversely to the direction of motion of the accumulator piston, and of a structural part which encloses it as the separating element of the accumulator, ~~and that it be~~. The switching valve is configured in the valve block of the valve control unit of the piston accumulator by ~~way of~~ a control switch as the motion sensor for the structural part. As a result of the electrical control components of this known piston accumulator, it is complex to manufacture and thus expensive, and when the electrical components fail, operating shutdowns occur.

WO 02/40871 A2 discloses a generic hydraulic accumulator, especially a piston accumulator, having an accumulator housing with a gas chamber ~~located therein~~ and a fluid chamber ~~which are located therein~~ separated from each other by a separating element, ~~and the~~. The fluid chamber can be charged with a pressure medium or at least partially emptied of the ~~latter medium~~ by ~~way of~~ a valve control unit having a switching valve, ~~and the~~. The switching valve ~~being is~~ housed in the respective valve receptacle which can be moved from an open position into a closed position and vice versa in the direction of motion of the separating element in the form of a piston. The valve control unit in ~~the~~ this known design is accommodated in a valve block which is independent of the housing, ~~the~~. The valve block ~~having has~~ another valve receptacle for another switching valve which performs another switching task. ~~In that for~~ For modular use, the two indicated switching valves are made as identical parts, ~~a~~. A complex line network between the

hydraulic accumulator and valve control unit is avoided ~~and tightness~~. Tightness or leakage problems as are common in the line network cannot occur at all. This hydraulic accumulator design is complex and thus expensive to produce, ~~and if~~. If electrically triggered valve systems are used, a complex control configuration is necessary; ~~this leads~~, leading to the above described disadvantages relative to operating reliability.

DE 101 61 475 A1 discloses another generic hydraulic accumulator solution with an accumulator-connecting block with ports for connecting the accumulator vessel of a hydraulic pump and a tank and with a 3-way valve for blocking and relieving the accumulator vessel. The blocking element of the 3-way valve is designed as a ball, with an operating shaft for stationary configuration of the centrically mounted blocking element, and with a circumferential surface which has apertures adjoining each respective sealing configuration which is assigned to each exit. In this known solution of an accumulator-connecting block, a sealed seat of the blocking element which is designed as a ball is ensured in each position of the valve. In the known solution, the accumulator-connecting block is spatially separated from the actual hydraulic accumulator.

~~On the basis of this prior art, the object of the~~ Summary of the Invention

~~Objects of the present invention is~~ are to devise provide a hydraulic accumulator, which, while preserving the advantages in the prior art, requires altogether less installation space ~~and~~, which permits favorable fluid guidance of the fluid flows to be managed, ~~further and which~~ improves ~~said the~~ accumulator such that it is economical to produce and maintain and permits reliable operation, especially when used in suspension systems in vehicles, such as excavators, farm tractors, etc. ~~This object is~~

~~These objects are basically achieved by a hydraulic accumulator with the features specified in claim 1 in its entirety.~~

~~In that, as specified in the characterizing part of claim 1, where~~ one free end of the accumulator housing is closed off by ~~the a~~ valve block having a ball valve which in its open position or closed position clears or blocks a fluid-carrying path from the interior of the accumulator housing

to the exterior; ~~the~~. The ball valve, by way of the valve block, is an integral component of the accumulator housing, and ~~in this way~~ is accommodated in a space-saving design within the hydraulic accumulator solution; ~~this~~. This arrangement also leads to a reduction of the free fluid paths and, therefore, to savings ~~as regards~~ regarding tubing. With the solution ~~as claimed in the of the present~~ invention, the accumulator housing is closed off by a valve block having a ball valve, which thus forms a part of the pressure-bearing wall of the hydraulic accumulator; ~~this leads,~~ leading to a high-strength connection between the indicated components, the accumulator, and accumulator block.

Since this configuration can be built as a modular system, a wide range of applications can be covered by the components comprising the accumulator housing, valve block, and ball valve by the respective components being matched as identical modules to the fluid flows to be managed and their pressures.

If for actuation of the ball valve, electrical actuating means are omitted, ~~a~~. A purely mechanical solution is ~~thus~~ achieved for the hydraulic accumulator, which is extremely reliable and which permits operation of the hydraulic accumulator in a very cost-effective way. If such a hydraulic accumulator is used in a suspension system ~~with~~, a suspension accumulator ~~which~~ is turned on by ~~way of~~ the fluid-carrying path to the hydraulic accumulator, ~~in~~. In the open position, the ball valve ~~being~~ is opened for springing of the suspension accumulator, ~~and being~~. The ball valve is diverted in its blocked position such that the suspension is blocked, ~~a~~. A very simple, economical solution is then attained for triggering and controlling a suspension system as is used in particular in excavators, agricultural machinery, and the like. Thus, for example, the damping of the suspension system in a machine such as a wheel loader can be turned off by ~~way of~~ the integrated ball valve of the hydraulic accumulator as soon as tasks, such as picking up a load, are carried out with the bucket of the wheel loader, ~~so that in~~. In this way, harmful oscillation processes for the wheel loader itself are avoided, ~~and as~~. As soon as transport tasks with or without a load, for example in roadway operation, arise, the suspension accumulator is turned on by ~~way of~~ the ball valve of the hydraulic accumulator. If the ball valve is actuated manually by an operator, in this area any electrical control components are eliminated so that the solution ~~as claimed in the of the~~

present invention can be very economically implemented and is reliable over the long term in operation.

~~Other advantageous embodiments of the hydraulic accumulator as claimed in the invention are the subject matter of the dependent claims~~ Other objects, advantages and salient features of the present invention will become apparent from the following detailed description, which, taken in conjunction with the annexed drawings, discloses a preferred embodiment of the present invention.

~~The hydraulic accumulator as claimed in the invention is detailed below using the drawing. The single figure shows schematically and not to scale a longitudinal representation of the hydraulic accumulator partially in a section, partially in a front view.~~ Brief Description of the Drawings

Figure 1 is a schematic, not to scale, side elevational view of a hydraulic accumulator, partially in a section and partially in plan view, according to an embodiment of the present invention.

Detailed Description of the Invention

The hydraulic accumulator ~~as shown in the figure~~ Figure 1 is configured as a piston accumulator. It has an accumulator housing 10 with a gas chamber 12 ~~located therein~~ and a fluid chamber 14. located therein. The gas chamber 12 is separated from the fluid chamber 14 by a separating element 16 in the form of a piston ~~which with~~. With its sealing system the piston is guided so as to be longitudinally displaceable along the inner circumference of the accumulator housing 10 so that the ratio of gas chamber 12 to fluid chamber 14 is kept variable. ~~In order to~~ To be able to store a larger amount of working gas (nitrogen gas) in the gas chamber 12, the piston element or separating element 16 is designed as a hollow part and inside has a corresponding recess 18. ~~Viewed As viewed in the direction of looking at the figure,~~ the gas chamber 12 is sealed to the exterior on its right side by a flanged cover part 20 ~~which has~~ having a center hole with a gas valve body 22 ~~by way of which.~~ Via gas valve body 22 the working gas, for example in the form of

nitrogen gas, can be delivered into the gas chamber 12. The accumulator housing 10 is sealed gastight by the gas valve body 22, ~~and by.~~ By the valve body 22, the amount of gas in the gas chamber 12 can be rechecked from time to time and can be added by ~~way of~~ a refill means (not shown).

The valve control unit ~~which is designated as a whole as~~ 26 is connected to the ~~opposing ends-free end~~ of the accumulator housing 10 opposite valve body 22, and is in the form of a control unit or valve block 24. The valve control unit 26 has a ball valve 28 ~~which is shown in its open position in the figure, in which it.~~ In the opening position, the ball valve clears a fluid-carrying path 30 to the exterior from the inside of the accumulator housing 10, here in the form of a fluid chamber 14. In its ball valve closed position, which on the other hand has been pivoted by 90°, from the open position, it blocks the respective fluid-carrying path 30 fluid-tight. The passage direction of the ball valve 28 shown in the figure in its open position therefore ~~runs over~~ extends along the transverse axis crosswise to the longitudinal axis 34 of the accumulator housing 10.

~~Furthermore, the~~ The pivot axis 36 of the blocking part 38 (plug) of the ball valve 28 is mounted off-center or offset from and parallel to the longitudinal axis 34 of the accumulator housing 10. The part 40 of the fluid-carrying path 30 within the valve block 24 runs or extends parallel and off-center ~~and/or radially offset,~~ as viewed in the ~~direction of looking at the~~ figure essentially underneath, the longitudinal axis 34 of the accumulator housing 10. ~~Then the~~ The blocking part (plug) 38 of the ball valve 28 is then configured diametrically opposite to this part 40 and relative to the longitudinal axis 34 of the accumulator housing. Another part 42 of the fluid-carrying path 30 is formed by a screwed part 44 ~~which,~~ running or extending transversely to the longitudinal axis 34 of the accumulator housing 10, ~~is~~ and screwed into the valve block 24 on the outer circumferential side in the direction of the transverse axis 32.

To actuate the blocking part 38 of the ball valve 28, a handle 46 is used which has an actuating knob 48. The handle 46 ~~moreover~~ has a pivot pin 50 ~~which~~ with its one free end ~~engages~~ engaging a groove-shaped recess 52 of the spherical blocking part 38. On its other free end, the pivot pin 50 is provided with an engagement screw 54 which holds the actuating knob 48 on the

pivot pin 50 torsionally strong ~~this way, for which purpose.~~ For this torsionally strong connection, the actuating knob 48 is provided with a collar 56 ~~which positively encloses~~ enclosing the pivot pin 50 in this area. Otherwise, the pivot pin 50 is pivot-mounted by ~~way of~~ a flange-like widening 58 in the valve block 24 ~~and the.~~ The pivot pin 50 between two edge-like segments 60 has a ring seal 62 ~~which in this way seals to~~ seal the interior of the valve block 24, especially with respect to the fluid-carrying path 30, relative to the surroundings.

~~Furthermore, on~~ On the front end of the valve block 24, the pivot pin 50 is provided with a stop ring 64 which interacts with a stop pin 66 ~~which fixed in the valve block 24 runs~~ and extending essentially along the longitudinal axis 34 of the accumulator housing 10. In this way the blocking part 38 (plug) can be pivoted out of its open position, shown in the figure, by 90° into a blocking position (not detailed) by the actuating knob 48 and the pivot pin 50, ~~this.~~ This pivoting being is limited by the stop ring 64 with the stop pin 66, in the same way as the possible pivot path when the blocking part 38 is being reset from its blocking position into the open position shown in the figure. These stop means are customary for ball valves so that they are not detailed here.

The accumulator housing 10 is designed preferably as a hollow cylindrical body ~~and the.~~ The valve block 24 meshes by ~~way of~~ a cylindrical extension 68 and by ~~way of~~ a screwed or externally threaded section 70 with one free end of the accumulator housing 10. This extension 68 widens flange-like and radially outside the accumulator housing 10, ~~the.~~ The flange-like edge 72 of the valve block 24 obtained in this way ~~forming forms~~ a stop surface for the front end of the accumulator housing 10 which is supported in this way on the edge 72 in the screwed-on state on the valve block 24. Furthermore, the cylindrical extension 68 tapers in the direction of the fluid chamber 14 ~~and in.~~ In the area of the respective taper ~~has,~~ a sealing part 74 ~~which seals~~ the fluid chamber 14 against the exterior in this area.

The ~~described~~ hydraulic accumulator is made as a piston accumulator, and can preferably be a component of a suspension system which is not detailed, with at least one suspension accumulator which is not detailed, for example in the form of a conventional bladder or diaphragm accumulator. This suspension accumulator which is not detailed is connected by ~~way of~~ the fluid-carrying path 30

to the screwed part 44 of the hydraulic accumulator either directly or by additional tubing from its fluid side. In the open position of the ball valve 28 shown in the figure, damping of the suspension can be connected, in which the fluid chamber 14 of the accumulator housing 10 is connected to the fluid side of the suspension accumulator ~~and in.~~ In this way, pressure surges by the damping action of the gas part of the suspension accumulator are effected. If the intention at this point is to eliminate this damping action of the suspension accumulator, the handle 46 is actuated by the actuating knob 48, and blocking part 38 (plug) of the ball valve 28 is moved into its position which blocks the fluid-carrying path 30. In this way, the suspension part of the suspension accumulator is diverted and accordingly the damping means is blocked. With the damping blocked, ~~then~~ for example with the shovel of a wheel loader for which the described hydraulic accumulator is used, it is possible to drive into the earth, bulk material, or the like, without pitching movements unintentionally occurring on the vehicle in the form of a wheel loader itself. The latter clearly improves working with the shovel unit of a wheel loader. When the load is then picked up by the shovel, the suspension can be turned on again for transport away on a road or the like, by the ball valve 28 being moved in the reverse sequence, as described, by the actuating knob 48 into its open position shown in the figure, in which the damping part of the suspension accumulator is then turned on again by ~~way of~~ the fluid-carrying path 30.

The hydraulic accumulator ~~as claimed in of the~~ present invention need not be limited to applications in wheel loaders, but can be used anywhere in suspension systems where damping devices such as suspension accumulators or the like are to be easily and reliably turned on and off, for example in the area of cultivating devices in agricultural machinery, if possible without complex control electronics. ~~But it~~ It is also within the scope of the present invention to replace the manually actuated handle 46 with an electrical actuating drive in the form of a servomotor ~~in order to thus~~ enable automatic triggering of the hydraulic accumulator, for example from a driver's compartment or the like. If in addition to the electrical actuating means, the handle 46 with the actuating knob 48 remains, emergency actuation would in this way be possible if the electrical actuating components should fail.

In another embodiment of the hydraulic accumulator ~~as claimed in the~~ of the present invention which is not detailed, it can also be provided that the ball valve be mounted obliquely in the middle, ~~and the~~. The ball valve could also be mounted with its pivot axis offset by 90° relative to the illustrated installation position.

While one embodiment has been chosen to illustrate the invention, it will be understood by those skilled in the art that various changes and modifications can be made therein without departing from the scope of the invention as defined in the appended claims.

What is claimed is:

HYDRAULIC ACCUMULATOR,
ESPECIALLY PISTON-TYPE ACCUMULATOR

Abstract of the Disclosure

A hydraulic accumulator, especially a piston-type accumulator, includes an accumulator housing (10) having inside at least one gas chamber (12) and a fluid chamber (14) separated from each other via a separating element (16), particularly in the form of a piston. One free end of the accumulator housing (10) is sealed via a valve block (24) provided with a ball valve (28). The ball valve opens or blocks a fluid-guiding path (30) from the interior of the accumulator housing (10) towards the outside such that the ball valve forms an integral part of the accumulator housing via the valve block, and is accommodated in a compact manner within the hydraulic accumulator solution, resulting in a reduction of the free fluid paths and a reduction of tubing.